

Pico Rugged - Intel Celeron J Series Dual LAN Extended -

The palm size, go anywhere computer!

Our Pico rugged powered by Intel Celeron J3455 is ideal for thin clients and kiosks and digital signage applications. Its tiny foot print and zero maintenance needs make the production ideal for applications 24/7 operation is needed and downtime is unacceptable.



Key Features

- Processor: Celeron J3455
- Operating Range: -10C to 50C
- Tiny foot print
- Windows IOT support
- Maintenance free

Key benefits of **FANLESS** and **RUGGED** computers



No fans obviously means no noise, but it's not the only benefit!



No fans allow an important decrease in power consumption, making our products more sustainable!



A fanless computer eliminates the risk to draw in dust and dirt from the environment, the cause of potential failures and costly downtime.



The absence of moving parts enable our products to resist shocks and vibrations, for an increased reliability.



They are built to withstand harsh and constrained working conditions.



High Ingress Protection (IP) rating, indication the protection level of products against both solid and liquids in electrical enclosures.




The in-house designed and milled aluminium chassis is optimized for efficient passive cooling and durability. Its conception proved their reliability in extended operating temperatures.



The aluminium used for the chassis production is repurposed and recycled, and the production waste is recycled too!

PR-CJDLE-51

Pico Rugged - Intel Celeron J Series Dual LAN Extended - IP51

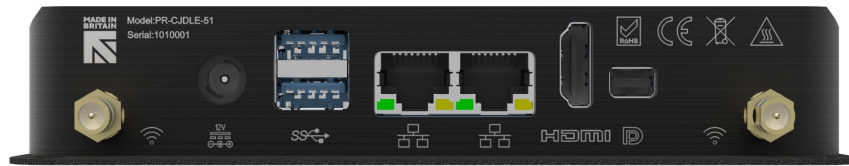

Rear view (some features shown maybe options)

Technical Specification

Processor	Intel Celeron J3455 - 4 core / 4 threads - 1.50 Ghz / Burst 2.30 Ghz		
Memory	Slots: None MAX Capacity: 8GB Type: LPDDR4-2400 1.1V ECC Support: No	Storage	Storage 1 Max: 512GB M.2 SSD 2242 Storage 2 Max: 128GB MicroSD
Graphics Controller	Intel HD Graphics 500	Graphics Interface	1 X HDMI 1.4b - 3840 x 2160 @ 30Hz 1 x MiniDisplay Port - 3840 x 2160 @ 60Hz
Network Interface	i210 - 2 x RJ45 - 10/100/1000 Mbps	Network Options	4G Option (in place of 2242 Storage options)
Network Feature	Wake-On-Lan	Remote Management	
Hardware Monitoring		Supported OS	Windows 10 IOT Enterprise 64 bit, eMMC Boost Windows 10 IOT Core, Redstone 64 bit Linux 64 bit, Yocto Linux Ubuntu
Encryption	TPM 2.0		
Power Input	2.1 x 5.5mm DC Jack		
Input Voltage	12V		
Consumption	4-11w		

Physical Specification

I/O Front	1 x RS232 Via 2mm 5 pin connection, 1 x S/PDIF for Audio	LED Front	
I/O Rear	DC-in 12V, 2x RJ45 for LAN, 2 x USB 3.0, 1 x MDP, 1 x HDMI	LED Rear	Network Uplink/Activity
I/O Optional	Dual Wireless Antenna	COM Port Option	RS232
Operational Temp	-10c to 50c (14F to 122F)	Storage Temp	-40c to 85c (-40F to 185F)
Maximum relative humidity	5% to 95%	Cooling Type	Passive Cooling
Size	145 x 98 x 27 mm	Weight	0.5 KG
Accessories	Power supply, power cord, Base plate Doubles as Wall Bracket	Optional Accessories	Wireless Antenna, VESA KIT
Certifications	CE, UKCA	Warranty	2 Years